


Flat Ribbon Cable

**RoHS
Compliant**



Applications

Internal wiring of appliances and electronic equipment

Standard

UL758 UL1581 C22.2

Electrical Characteristics

Rated Voltage	: 300V
Voltage-Withstand	: 2500V/1 Minute
Cond. Resistance	: 93.2Ω/km 20°C Max.
Insu. Resistance	: 0.75MΩ/km 20°C Min.
Temperature Rating	: -20°C to +105°C

Physical Properties

Tensile Strength Unaged	: 1500PSI Min
Tensile Strength Aged	: Residual Rate/75% Min
Elongation Unaged	: 100% Min
Elongation Aged	: Residual Rate/65% Min

Construction


Conductor

No. of Cores	: 10
Size	: 24 AWG
Construction	: 7/0.2 ±0.005mm
Material	: Tinned Copper Conductor
Diameter	: 0.61mm ±0.05mm

Insulation

Material	: 105°C PVC
Thickness	: 0.33mm (Min.)
Average Thickness	: 0.38mm
Pitch	: 1.4 ±0.15mm
Diameter	: 1.4 ±0.15mm
Colour	: Brown, Red, Orange, Yellow, Green, Blue, Purple, Grey, White and Black

Diagram

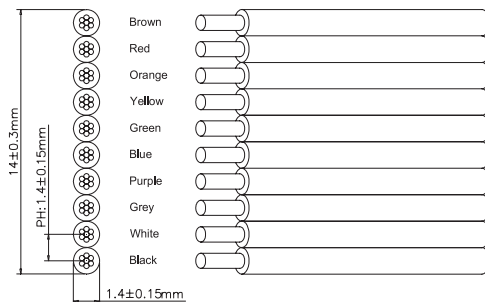

Dimensions : Millimetres

Important Notice :