
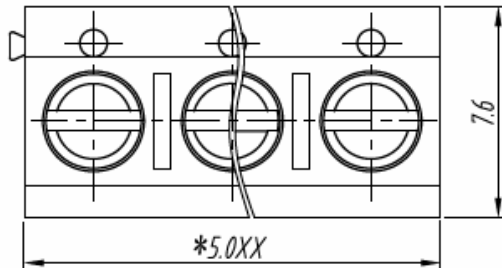


SECTION A-A

P.C.B.LAYOUT

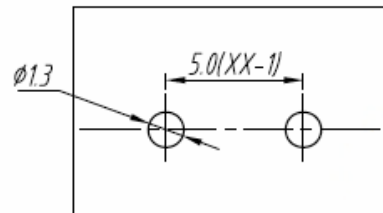

Electrical


Standard	UL	IEC
Rated voltage	250V	250V
Rated current	16A	24A
Contact resistance	20mΩ	
Insulation resistance	5000MΩ/DC1000V	
Wire range	22-14 AWG 2.5mm ²	
Withstanding voltage	AC 2000V/1 Min	

Mechanical

Temp.Range	-30℃ ~ +120℃
MAX Soldering	+250℃ for 5 Sec
Torque	0.4Nm(3.6lb .in)
Strip length	4.5-5mm

Material

Housing	PBT,UL94V-0
Screws	M2.5 steel Zinc plated
Pin housing	Brass, Tin plated
Wire guard	Phosphor bronze, Ni plated

NINIGI			
APPD. Helen		TOLERANCE	PART NAME 品名
DWG. abby		SCALE 参考	.9 ±0.4 .40 ±0.25 ANG. ±
DATE 2011/12/07	UNIT M M	SIZE A 4	TB-5.08-P-3P/BL
	PAGE 1 OF 1	REV. B	